



INLET FLANGE DETAIL

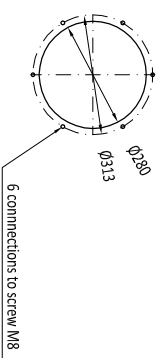

OUTLET FLANGE DETAIL

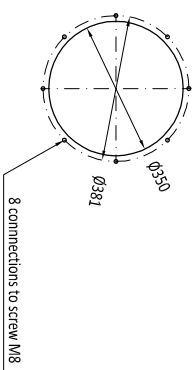

		<b>ITEM:</b> KOMPAC AIR 2x2 CCD Q=4000 Nm <sup>3</sup> /h <small>REV:04/2019/02/2019</small>
<b>TECHNICAL SPECIFICATIONS</b>		
Weight	kg	710
Number of filtering elements	nr	4
Filtration surface	m <sup>2</sup>	75
Max working under pressure	Pa	5000
Working temperature	°C	-10<T<60
Pneumatic feeding	Ø	1"1/2 GAS
(ISO Class 2.4.1 according 8573-1:2000)		
Electric control panel feeding		230 V AC 50Hz
Cartridges cleaning system	nr	jet-pulse
Number of cleaning valves		2
Type of cleaning system valves		Ø1" 1/2 - 24 V DC
Compressed air tank working pressure	bar	5
<b>PERFORMANCE CHARACTERISTICS</b>		
Nominal air flow	Nm <sup>3</sup> /h	4000
Nominal static pressure	Pa	3250
Nominal fan power	kW	5.5
Max compressed air consumption	Nl/shot	217