

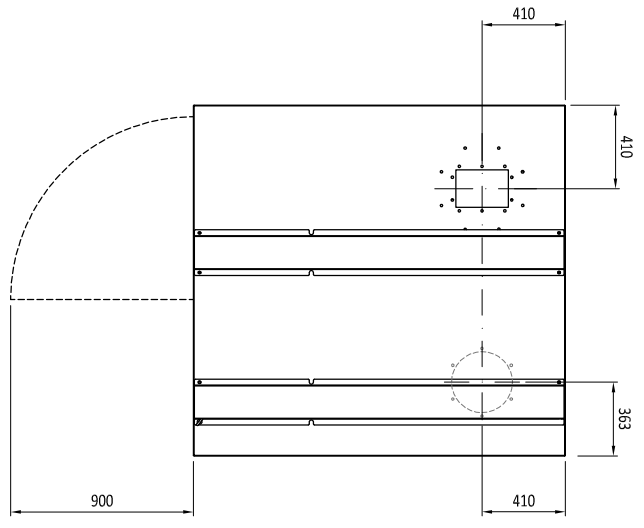



GROUND FASTENING LAYOUT (SECTION A-A)

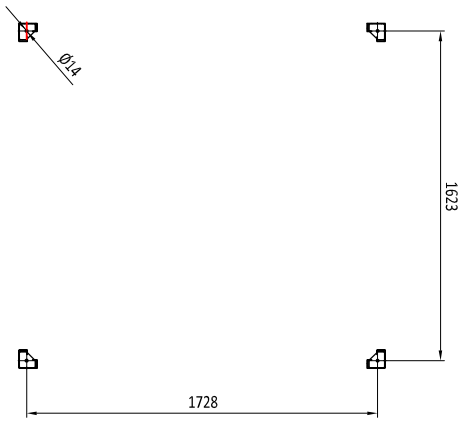

INLET FLANGE DETAIL



OUTLET FLANGE DETAIL



		tama@tama.eu www.tama.eu
ITEM:	KOMPAC AIR	
	3x2/0	
	Q=4400 Nm <sup>3</sup> /h	
<small>REF. IN DRAWING</small>		

TECHNICAL SPECIFICATIONS	
Weight	kg 1200
Number of filtering elements	nr 6
Filtering surface	m <sup>2</sup> 126
Max working under pressure	Pa 5000
Working temperature	°C -10<-60
Pneumatic feeding	Ø 1/2" GAS
(ISO Class 2,4,1 according 8573-1:2000)	
Electric feeding	400 V - 50Hz
Cartridges cleaning system	jet-pulse
Number of cleaning valves	nr 6
Type of cleaning system valves	Ø1" 24 V DC
Compressed air tank working pressure	bar 4,5
PERFORMANCE CHARACTERISTICS	
Nominal air flow	Nm <sup>3</sup> /h 4400
Nominal static pressure	Pa 3190
Nominal fan power	kW 5,5
Max compressed air consumption	Nl/min 360