


INLET FLANGE DETAIL

OUTLET FLANGE DETAIL

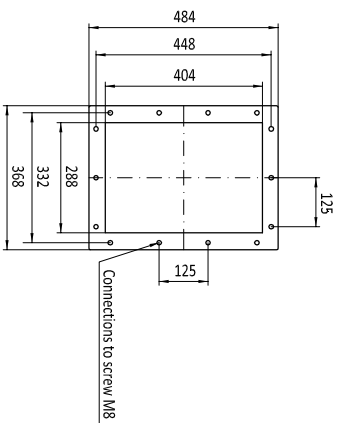

	ITEM:	KOMPAC AIR 3x2 CCD
		Q= 6000 Nm <sup>3</sup> /h
<small>REV.01/2016/02/01</small>		
<b>TECHNICAL SPECIFICATIONS</b>		
Weight	kg	775
Number of filtering elements	nr	6
Filtering surface	m <sup>2</sup>	113
Max working under pressure	Pa	5000
Working temperature	°C	-10<T<60
Pneumatic feeding (ISO Class 2.4.1, according 8573-1:2000)	Ø	1 1/2 GAS
Electric control panel feeding	230 V AC 50Hz	
Cartridges cleaning system	jet-pulse	
Number of cleaning valves	nr	3
Type of cleaning system valves	Ø1" 1/2 - 24 V DC	
Compressed air tank working pressure	bar	5
<b>PERFORMANCE CHARACTERISTICS</b>		
Nominal air flow	Nm <sup>3</sup> /h	6000
Nominal static pressure	Pa	2860
Nominal fan power	kW	7.5
Max compressed air consumption	Nl/shot	217